

# Tri-Mer Chrome Eliminators

How to build your model number.....

## ORIENTATION

X	Horizontal
V	Vertical

## RECIRCULATION SYSTEM

R	Internal Recirculation Tank
D	Dry Sump

## FLOW RATE


012	100-1200 CFM
020	1200-2000 CFM
032	2000-3200 CFM
045	3000-4500 CFM
062	4500-6200 CFM
080	6200-8000 CFM
100	8000-10,000 CFM
125	10,000-12,500 CFM
150	12,500-15,000 CFM
180	15,000-18,000 CFM
210	18,000-21,000 CFM
240	21,000-24,000 CFM
260	24,000-26,000 CFM
300	26,000-30,000 CFM
320	30,000-32,000 CFM
360	32,000-36,000 CFM
400	36,000-40,000 CFM
450	40,000-45,000 CFM
500	45,000-50,000 CFM

## FILTRATION

H	Hepa Filter for fourth stage.
-	Blank if no Hepa filter required.

Model #

C/E-				
------	--	--	--	--

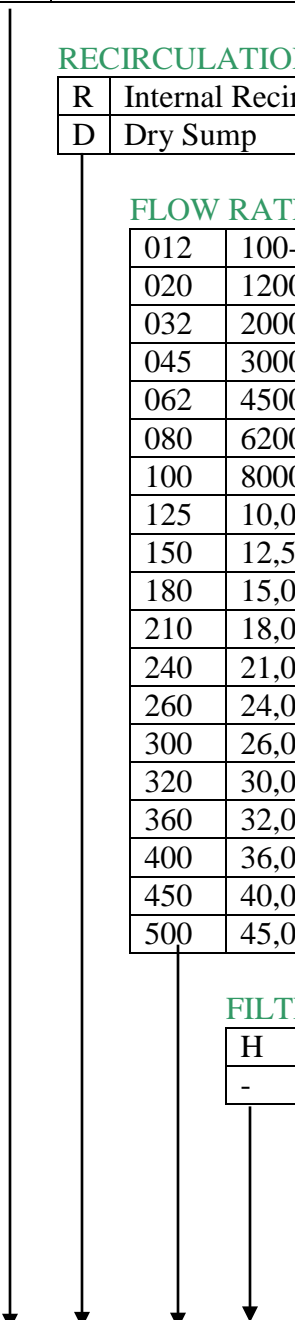

## Operation;

### Stage 1

"KIMRE" B-GONE MIST ELIM. PAD, P.P. CONST.,  
3.0" THICK, .67" W.C." @ 500 FPM., 3L 37/94, 3L 16/96.

*Continuous spray from recirculation pump @ 10 psi. Flow rate is 2 to 3 GPM per square foot.*

### Stage 2

"KIMRE" B-GONE MIST ELIM. PAD, P.P. CONST.,  
3.4" THICK, 2.43" W.C." @ 600 FPM., 12L 8/96, 1L 16/96, 1L 37/94

*Timed fresh water spray. Flow rate is .5 to 1 GPM per square foot. Timing is 5 minutes once every 2 to 3 hours.*

### Stage 3

"KIMRE" B-GONE MIST ELIM. PAD, P.P. CONST  
7.2" THICK, .67" W.C." @ 500 FPM., 6L 37/97.

*Dry stage.*

### Stage 4

Optional Hepa.

*Nozzels will be Bete 170 degree TF series or 120 degree WL series. This selection per Jerry Black 10/23/98.*

[astgroup.ca](http://astgroup.ca)



**AST GROUP**  
OF COMPANIES

**905-821-8860**



**Air Separation  
Technologies Inc.**  
[astcanada.ca](http://astcanada.ca)



**AST**  
Engineering Inc.  
[astengineering.ca](http://astengineering.ca)



**AST**  
Mechanical Inc.  
[astmechanical.ca](http://astmechanical.ca)



**STEVENSON SPRINKLER**.CA  
& Fire Protection Ltd.  
[stevensonssprinkler.ca](http://stevensonssprinkler.ca)